

High speed 1 MS/s Datalogger with Voltage and Temperature Measurements

Isolated simultaneous 8 channel data logger midi LOGGER GL980

Multifunction input on 8 isolated channels including true-RMS value measurement

Voltage	20 mV to 500 V DC, 1-5 V DC 10 mV to 250 V rms	Pulse	4 channels (*1) Accumulating, instant or RPM
Temp	Thermocouples: K, J, E, T, R, S, B, N, W (WRe5-26)		
Humidity	0 to 100% (the B-530 option is required)	Logic	4 channels (*1)

Safer input terminal

Isolated BNC and screw terminal for each channel.



Available input signal cable

Isolated Banana - BNC RIC-147A(*2)	Clip, Alligator (small) RIC-144A (*3)	Clip, Alligator (middle) RIC-145 (*3,4)	Clip, Grabber RIC-146A (*3)
---------------------------------------	--	--	--------------------------------



Input/Output cable for GL series
B-513



*1: Select either Pulse input or Logic input, and use the optional input/output cable for GL (B-513 option).
*2: Sales discontinued in the U.S. and China.
*3: Used with RIC-147A.

*4: Sales discontinued in the U.S. and EU.

*5: Numbers are approximate and under the following conditions.

- Using 8 channels of analog input only and data is saved as a GBD file.
- External memory device is set to SD flash memory card or USB flash memory with 8 GB or more data capacity.
- File size of recorded data is up to 4GB.



Additional memory function

■ Long term recording capability

4 M sample/ch built-in RAM and 4 GB built-in Flash memory. Continuous measurement supports up to 4 GB per file.

Memory type (*5)	1MS/s (1μs)	100kS/s (10μs)	1kS/s (1ms)	1S/s (1s)
Built-in RAM (4 M samples/ch)	4 seconds	40 seconds	66 minutes	46 days
Built-in Flash memory (3.9 GB)	N/A	N/A	2 days 6 hrs	Over 1 year
External memory (SD/USB Flash memory)	N/A	N/A	2 days 11 hrs	Over 1 year

■ Large built-in RAM (4 million samples per channel)

Built-in RAM can divide into 1, 2, 4, or 8 blocks supporting continuous high-speed recording measurement with auto backup on the internal Flash memory or USB.

■ Dual external recording available through USB and SD Card Flash memory

Both the USB Flash memory device and the SD Flash memory card can be used as external storage device for recorded data.

High performance and easy to use software for PC

Standard software: GL980_2000-APS

- Easy connection made possible with automatic search function for connected device.
- Multiple display format using Y-T graph, X-Y graph and digital values.
- Supports real time data transfer up to 1 ms sampling interval. Recorded data from the built-in RAM can also be displayed.
- Recorded data saved in binary format can convert to CSV format.

Functions

Configure GL unit


Control GL unit

Real-time data display

Replay saved data

Data format conversion

Y-T graph (waveform) display

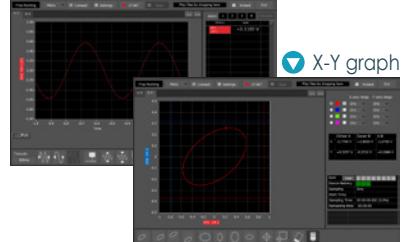

X-Y graph

Main unit specifications	
Item	Description
Number of analog input channels	8 channels
External input/output	Input (*1) Output (*2)
Trigger function	Trigger action Start or stop recording data by triggering Repeat action Off, On (Re-armed automatically) Trigger source Start/Stop: Off, Measured signal, Alarm, External, Scheduled time, Scheduled day, Elapsed time Combination Level OR, Level AND, Edge OR, Edge AND Threshold High or Low in level mode, Rising or Falling in edge mode, Window-in (*3), Window-out (*3)
Alarm function	Alarm action Display and outputs a signal when alarm is detected Combination OR (Source channel can be assigned with OR condition to output port) Threshold • Analog input : High, Low, Window-in, Window-out • Logic input : H or L • Pulse input : High/Rising, Low/Falling, Window-in, Window-out
Calculation function	Between channels Addition, subtraction, multiplication and division for two analog inputs (only in GBD format) Statistical Real-time or between cursors in replay recorded data • Function : Max, Min, Peak-to-Peak, Average, RMS (only for replay)
Scaling (Engineering unit) function	Measured value can be converted to the specified engineering unit
Storage device	Built-in RAM Four million samples for each channel (Memory partition: 4 M samples x 1 block, 2 M sample x 2 blocks, 1 M samples x 4 blocks, 512 k samples x 8 blocks) Built-in Flash 8 GB External USB Support USB Flash memory device by USB2.0 Type A port, No memory capacity limit (Max single file size : 4 GB) External SD card Support SDHC memory card (up to 32 GB) by SD Card slot (Max single file size : 4 GB)
Recording mode	Mode Off (Normal), Ring, Relay Off (Normal) Save data between start to stop Ring(*4) Save most recent data of specified number • Destination : Built-in RAM, Built-in Flash, USB or SD • Number of recording data: 1000 to 1000000 points (*5) • Sampling : 1 MS/s (interval 1 μs) in built-in RAM, 1 KS/s (interval 1 ms) with GBD format in other device, 100 S/s (interval 10 ms) with CSV format in other device Relay Save data to multiple files with specified recording time or file size (up to 4 GB) until recording data is stopped • Destination of data : Built-in Flash, USB or SD • Sampling : 1 KS/s (interval 1 ms) with GBD format, 100 S/s (interval 10 ms) with CSV format
Data backup	Interval Off, 1, 2, 6, 12, 24 hrs, specific time, or any time with key operation • Sampling : up to 1 KS/s(interval 1 ms)with GBD format, up to 100 S/s (interval 10 ms)with CSV format Data destination Built-in Flash memory, USB memory device, SD Flash memory card,FTP Data format GBD (binary) or CSV (text) Hot-swapping USB Flash memory device or SD Flash memory with key operation
Display (LCD)	Size 7-inch TFT color LCD (WVGA: 800 x 480 dots) Information Waveform in Y-T with digital values, Enlarged waveforms, Digital values and statistics values, X-Y graph
Interface to PC	Type Ethernet (10 BASE-T/100 BASE-TX), USB2.0 Ethernet functions Web server function, FTP server function, NTP client function, DHCP client function, Email send function USB function USB mode (File transfer and deletion from internal GL980 memory)
Operating environment	0 to 40 °C when driven by AC adapter or battery, 5 to 85 % RH (non condensed)
Power source	AC adapter : 100 to 240 V AC, 50/60 Hz DC power : 8.5 to 24 V DC Battery pack : Mountable two battery packs (*6)
Power consumption	Approx. 66 VA (using the AC adapter at 240 V, with LCD display on, and battery packs being charged)
External dimensions [WxHxD]	Approx. 250 x 161 x 80 mm
Weight	Approx. 1.4 kg (AC adapter and batteries are not included)
Vibration resistance	Compatible with JIS Vibration test method for automobile Type 1 Class A (Vibration durability test: 5 m/s ²)

*1: Select either Logic input (4 channels) or Pulse input (4 channels), select either external Trigger input or Sampling input. Required Input/Output cable for GL series (B-513) option for connecting signal.
 *2: Select either Trigger output (1 channel) or Alarm output (1 channel). Available 3 channels Alarm output always. Required Input/Output cable for GL series (B-513) option for connecting signal.
 *3: Not available with logic input.
 *4: Required minimum recording time is 15 seconds in GBD format, 30 seconds with CSV format.
 *5: When using built-in RAM, 10 to 4000000 points
 *6: Required two batteries (B-569) packs when in battery mode.
 *7: Connections can be made individually to BNC terminal or M3.5 screw terminal. Those are connected to the same channel.
 *8: When using built-in Flash, SD memory card and USB memory, sampling is 1 KS/s to 1 S/m (1 ms to 60 s). When using the External, required Input/Output cable for GL series (B-513) option for connecting signal.
 *9: Measures the accumulated value of the DC and AC components in effective value, that is a true-RMS.
 *10: Graphtec does not support software/driver used with operating systems that have become obsolete and are no longer supported by the OS developer.
 In the Windows 7, edition of Ultimate, Enterprise, Professional and Home Premium are supported.
 * Due to the possibility of equipment or PC failure, the data files on the instrument will not be guaranteed to be held on the memory. Please make a backup of data whenever possible to avoid data loss.
 * Brand names and product names listed in this brochure are the trademarks or registered trademarks of their respective owners.
 * Items mentioned are subject to change without notice.
 For more information about product, please check the web site or contact your local representative.

Analog input specifications		
Item	Description	
Type of input terminal	Isolated BNC connector and Screw terminal (M3.5 screw) (*7)	
Input method	All channels isolated unbalanced input, Simultaneous sampling	
Sampling speed (interval) (*8)	1 M Samples/s to 1 Sample/min (1 μs to 1 min) and External	
Frequency response	DC to 200 kHz (within +1/-4 dB)	
Measurement range	Voltage (DC) 20, 50, 100, 200, 500 mV, 1, 2, 5, 10, 20, 50, 100, 200, 500 V, and 1-5V F.S. Voltage (DC-RMS) (*9) 10, 25, 50, 100, 250, 500 mV rms, 1, 2.5, 5, 10, 25, 50, 100, 250 V rms F.S. • Crest Factor: up to 2 Temperature Thermocouple: K, J, E, T, R, S, B, N, W (WRe5-26) Humidity 0 to 100 % RH - using the humidity sensor (option B-530)	
Filter (Low pass)	Off, Line (1.5 Hz), 5, 50, 500 Hz, 5, 50 kHz (at -3dB, -6dB/oct)	
A/D converter	16-bit (effective resolution: 1/40000 of the measuring full range)	
Maximum input voltage	(+) to (-) terminal 20 mV to 2 V range: ± 30 V, 5 V to 500 V range: ± 500 V Between channels 60 Vp-p channel - GND 60 Vp-p	
Maximum voltage (withstand)	Between channels 1000 Vp-p (1 minute) channel - GND 1000 Vp-p (1 minute)	
External input/output specifications		
Item	Description	
Input signal specification for Logic/Pulse and	Voltage range : +5 to +30 V (common ground) In Logic/Pulse, Threshold : Approx. +2.5 V In Trigger/Sampling, Threshold : Approx. +1.9 V	
Logic measurement	Measures the status (H or L) of the signal input to each channel	
Pulse measurement	Measurement Counts pulse signals input to each channel Max. pulse input Max. input frequency : 100 kHz, Max. count number : 15 M count Count detection 10 μs to 1 hr. (Set separately from analog signal sampling interval) Measurement mode • Rotation : Counts pulses and converts to rotation in rms, span is up to 500 M rpm • Accumulating : Accumulates pulses counted from the start, span is up to 20 M counts (it is set automatically) • Instant : Counts pulses per detection cycle, span is up to 20 M counts	
External trigger input (*8)	Executes specified trigger action	
External sampling input (*8)	Executes sampling of measurement signal with each external sampling signal, max. input frequency is 100 kHz	
Output signal	Alarm output Open collector (pull-up to 5 V with 10 kΩ resistor), maximum load is the 24 V and 100 mA Trigger output When a trigger is detected, 500 μs width pulse is released	
Software specifications		
Item	Description	
Model name	GL980_2000-APS	
Supported OS (*10)	(PC) Windows 11	
Functions	Control the GL series, Real-time data record, Replay data, and Data format conversion	
Supported device	1 unit of GL980 or GL2000	
Settings control	Input condition, Recording condition, Trigger/Alarm condition, etc.	
Transfer of recorded data from GL980	In memory recording Transfer the recorded data to a PC sequentially while data is being saved in built-in RAM, sampling interval is 1 μs to 60 s In real time recording Transfer the recorded data to a PC while data is being saved in built-in flash memory, SD memory card or USB memory In GBD and CSV format, sampling interval is 1 ms to 60 s	
Displayed information	Analog, Logic, Pulse count waveform, and Digital value	
Display mode	waveform Y-T with digital values, Enlarged waveforms, Statistical calculation result values and history, XY graph	
File operation	Converting data format to CSV from GBD binary with data between cursors or all data	
Past data screen function	Displays the current data or past part of data by switching. Available at sampling speed 1 KS/s to 1 S/m (1 ms to 1 min sampling interval)	
Statistical calculation	Max., Min., Average and Peak-to-Peak value during data recording	
Standard accessories		
<ul style="list-style-type: none"> AC adapter with power cable Notice Screws (M3.5) for input terminal 		
<ul style="list-style-type: none"> • TO ENSURE SAFE AND CORRECT USE • Tilt stand set (including mounting screws M4) • Ferrite core (attach to cable for radiation reduction) 		
Options and Accessories		
Item	Model No.	Description
Input/Output cable for GL	B-513	2 m long (no clip on end of cable)
DC drive cable	B-514	2 m long (no clip on end of cable)
Humidity sensor	B-530	With 3 m long signal cable (with power plug)
Shunt resistor	B-551	250 ohms (Converts signal from "4-20mA" to "1-5V")
Battery pack	B-569(*11)	Rechargeable Lithium-ion battery (7.2 V, 2900mAh)
Bracket for DIN rail	B-570	Bracket for DIN rail (GL980 main body), Build-to-order
Carrying case	B-581	Used with GL980, GL2000
Input cable, BNC - BNC	RIC-142	Insulated, 1.5 m long, 1000 V DC, CAT II(600V • CATIII)
Clip, Alligator (small size)	RIC-144A	For RIC-147 Aperture 11 mm, 300 V DC, CAT II, Max. 15 A
Clip, Alligator (middle size)	RIC-145(*12)	For RIC-147 Aperture 20 mm, 1000 V DC, CAT II, Max. 32 A
Clip, Grabber	RIC-146A	For RIC-147 Aperture 5 mm, 1000 V DC, CAT III, Max. 1 A
Input cable, Banana - BNC	RIC-147A(*13)	Insulated, 1.6 m long, 1000 V DC, CAT II(600V • CATIII)
AC Adapter	ACADP-20	Input: 100 - 240 V AC, Output: 24 V DC

*11: Sales discontinued in China and India.
 *12: Sales discontinued in the U.S. and EU.
 *13: Sales discontinued in the U.S. and China.

Important safety instructions

- Before using it, please read the user manual and then please use it properly in accordance with the description.
- To avoid malfunction or electric shock, please ensure ground connection and use it in specified power source.

GRAPHTEC
Graphtec Corporation

503-10 Shinano-cho, Totsuka-ku, Yokohama 244-8503, Japan

Website <https://www.graphteccorp.com>



GL980_KE11103_7D